Electronic Access Control

Pushbutton Locks

Grade 2, EL700-Series

Overview

Keyless convenience in easy to install deadbolt and lever locks. All models have a conventional key cylinder, combined with an electronic keypad that can be programmed with multiple unique codes. The EL700 Series is available in three convenient options: EL730SLR which allows up to ten radio frequency remotes to be programmed; the EL740 deadbolt which can be programmed to unlock with up to ten MiFare Smart Cards, and offers an optional single use code feature; and the EL750 lever lock which has a conventional key cylinder and an electronic keypad, and can be programmed with up to 100 unique user codes to operate the lock. These locks can be installed in place of most conventional locks with no drilling required.

EL710
Shown in 11P Finish

EL730/EL740
Shown in MB3 Finish

EL750
Shown in 15 Finish

Finishes

716 / US11P
Aged Bronze
(Similar to US10B)



619 / US15
Satin Nickel

MB3
Millennium Brass
Lifetime Polished Brass

Standard Features

CERTIFICATIONS: ANSI/BHMA meets Grade 2 specifications, (EL730 and EL740: UL listed 90 Minutes)

LATCH: EL710 has adjustable 2¾" or 2⅜" backset; EL730/EL740 have an adjustable 2¾" or 2⅜" backset, 6-Way square corner, radius corner or drive-in with 1" bolt projection. EL750 has adjustable 2¾" or 2⅜" backset, square corner

HANDING: EL710/EL730/EL740: Reversible (Auto Handing); EL750: Easily field handed

MATERIALS: Zinc diecast

STRIKE: EL730 and EL740: 2¾" x 1⅛"; EL750: 2¼" x 1¾"

DOOR PREP: EL710: 2⅛" or 1½" diameter bore; EL730 and EL740: 2⅛" diameter bore, 1" crossbore, one additional 5/16" hole required if optional thru-bolt is used; EL750: 2⅛" diameter bore, 1" crossbore

DOOR THICKNESS: 1⅜" - 2"

KEYING: Equipped with SC4 rekeyable 6-pin cylinders for key override

BATTERY: Uses 4 AA Alkaline Batteries (not provided); EL730 and EL740 offers a 5,000 operation battery life; EL750 offers a 50,000 operation battery life

TIME INTERVAL: Optional auto-locking/relocking adjustment, 10-90 seconds

ENVIRONMENTAL: Weather Resistant; Operating Temperature 32°F to 150.8°F

STYLES:

- EL710*: Electronic Deadbolt Lock
- EL730: Remote Control Deadbolt Lock
- EL740: Smart Card Deadbolt Lock
- EL750: Electronic Lever Lock

**Sold only at IDN-Canada*

Electronic Access Control: Pushbutton Locks, EL700 Series

Functions:

EL710:
- Exterior: Unlock with key. Unlock with up to 10 unique user codes.
- Interior: Locking/Unlocking by thumbturn

EL730:
- Exterior: Lock or unlock with mechanical key. Lock or unlock by pressing a single button on a remote control (sold separately). Lock by pressing a single button on keypad and unlock with up to 10 unique user codes. Use Mfr# RFR730
- Interior: Locking/unlocking by thumbturn, or by pressing a single button on a remote control.

EL740:
- Exterior: Lock or unlock with mechanical key. Lock by pressing a single button on keypad. Unlock with up to 10 unique user codes or up to 10 MiFare smart cards.
- Interior: Locking/unlocking by thumbturn.

EL750:
- Exterior: Unlock with key. Unlock with up to 100 unique user codes.
- Interior: Inside lever always retracts latchbolt.

Features:

EL710:
- Operated by code or key.
- Up to 10 user codes.
- Adjustable automatic relocking delay.
- Any code can be set up for single-entry and become invalid after one time use
- Flexibility to choose the automatic relocking mode

EL730:
- Automatically detects and sets bolt direction.
- Optional auto relock feature, adjustable from 10 to 90 seconds after unlocking.
- Temporarily lock out all User Codes with Program Code.
- Optional "keypad mute mode" for quiet locations.
- One-time User Codes (up to 5) and One-time Remotes (up to 5) can be programmed.
- Optional dual authorization mode requires *both* User Code and Remote Control to unlock.
- "Master Key System" option allows 1 remote control programmed into every lock as a master remote, and remaining remotes are user access
- Up to 8 million unique transmitter codes, Use Mfr# RFR730

EL740:
- Single-cylinder deadbolts operated by numeric code, MiFare smart card or key.
- MiFare contactless smart cards issued by banks and transit agencies can be used with the lock.
- Automatically detects and sets bolt direction.
- Optional auto relock feature, adjustable from 10 to 90 seconds after unlocking.
- Temporarily lock out all User Codes with Program Code.
- Optional "keypad mute mode" for quiet locations.
- One-time User Codes (up to 5) and one-time cards (up to 5) can be programmed.
- Optional dual authorization mode requires *both* User Code and Card to unlock.

EL750:
- Operated by code or key.
- Up to 100 user codes.
- Auto relock adjustable from 10 to 90 seconds.
- Internal switch for passage mode.
- Temporarily lock out all User Codes with Program Code.
- Optional "keypad mute mode" for quiet locations.

Dimensions:

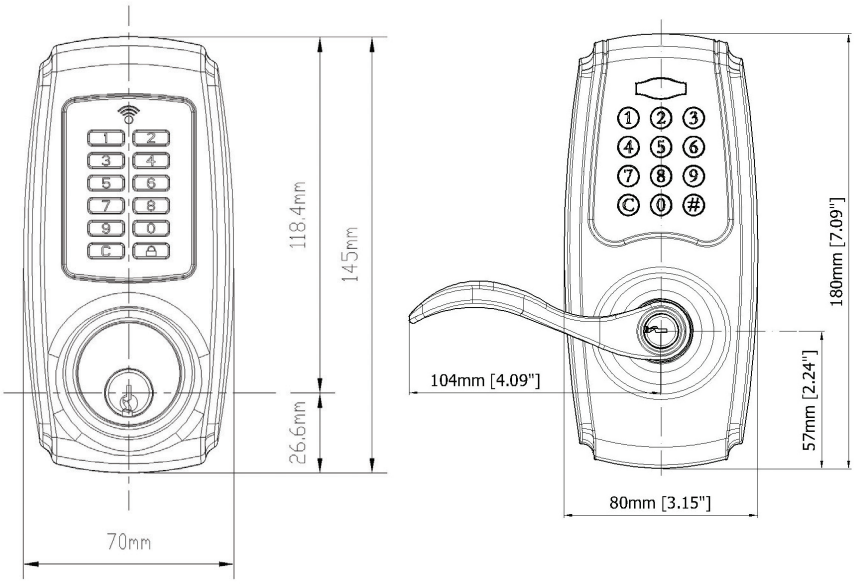

Parts & Accessories

- ***RFR730:*** Remote Control, for EL730
- ***SC740:*** MiFare SmartCard, EL740

RFR730

SC740

© 2017 IDN, Inc. All rights reserved.

MCPBEL700 121517